




FLO-EX

APPLICATIONS

- ◆ Head Gaskets
- ◆ Hot Gaskets
- ◆ Metal Gaskets
- ◆ Exhaust Manifold Gaskets
- ◆ Exhaust Pipe Flanges
- ◆ Muffler Assemblies

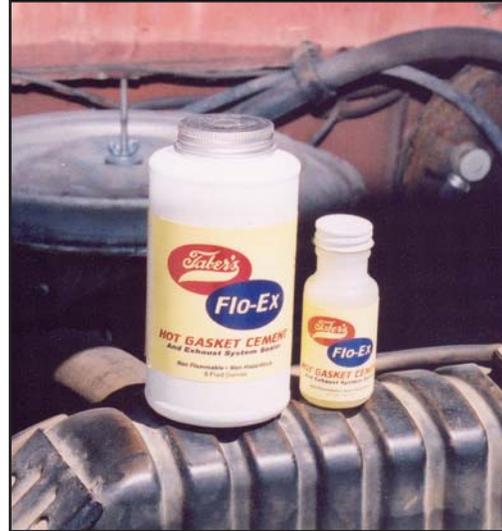

ADVANTAGES

- ◆ Saves Time and Money
- ◆ Sets Hard
- ◆ Resists Solvents
- ◆ Won't Interfere with Disassembly
- ◆ Cleans up with Soap and Water

VERSATILE - Taber's Flo-Ex is formulated for use with hot gaskets such as head gaskets. It can also be used on exhaust system assemblies.

EFFECTIVE - Flo-Ex will flow and expand with heat to fill irregularities and small gaps helping to ensure a pressure tight seal. All sizes include dauber caps for easy application.

SAFE - Flo-Ex is water based, environmentally and consumer friendly, nonflammable, nonhazardous, has low VOCs, and cleans up easily with soap and warm water before it dries.

TABER'S PRODUCTS, INC.
Email: orders@tabersproducts.com
P.O. Box 197 • 215 Main Street
Henrietta, Missouri 64036
Fax: (816) 494-5485

"It Pays To Stick With Taber's"
1-800-280-9903




FLO-EX

APPLICATION INSTRUCTIONS

Gaskets:

- 1) Make sure gaskets and all surfaces to which they are to be applied are clean, dry and free of dirt, rust, oil or dried paints or sealants.
- 2) Apply an even coating as required to both application surfaces using dauber. A single coating is sufficient for most applications.
- 3) Quickly press gasket into place and commence assembly.
- 4) Always use a torque wrench to help ensure an even seal.

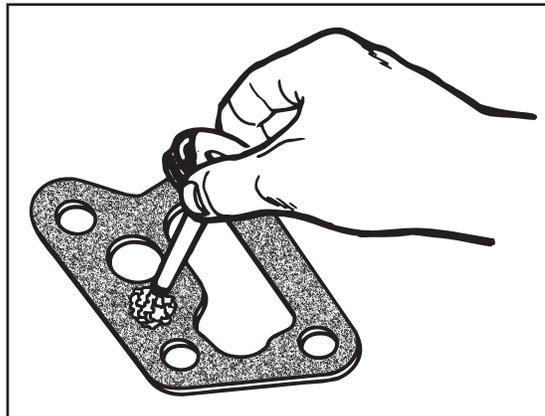

Exhaust Assemblies:

- 1) Make sure flange surfaces are clean, dry and free of dirt, rust, oil or dried paints or sealants.
- 2) Apply a liberal coating as required to both application surfaces using dauber.
- 3) Commence assembly.
- 4) Do not over tighten.

Temperature:

Apply between 40°F and 110°F.

Cleaning:

Cleans up with soap and warm water.

TECHNICAL SPECIFICATIONS

Description:

Taber's Flo-Ex is a water-based, environmentally friendly compound formulated for use with hot gaskets and exhaust assemblies. The product is not detrimental to hot dip tanks. Cleans up with soap and warm water before it dries. Nonflammable. Nonhazardous

Physical & Chemical Properties:

Appearance	Creamy, light yellow liquid Colorless when dry
Odor	Pleasant Fragrance
Flashpoint	Greater than 300°F
Viscosity	200-300 at 30 rpm Brookfield
Specific Gravity	1.4
Weight per Gal.	11.6
pH	11.5 - 12.0

Storage:

Tightly close container. Store in a dry place at a temperature between 40°F and 110°F. Do not allow to freeze. To minimize contamination, do not put unused product back in original container.

Incompatible Materials:

Not to be used with strong oxidizers such as chlorine or pure oxygen.

Health Warning:

Do not ingest. If swallowed consult your physician. Keep out of the reach of children.

For specific information regarding the safe handling and disposal of Taber's Flo-Ex please consult the MSDS. MSDS available by calling 1-800-280-9903.