

Taber's GASKET SEALER

APPLICATIONS

- ◆ Cork, Felt, Paper, Rubber and Composite Material Gaskets
- ◆ Valve covers
- ◆ Shellac for Water Pumps and Fuel Pumps
- ◆ Belt Conditioner
- ◆ Thread Sealer
- ◆ Soft Lugs
- ◆ Radiator Hoses



ADVANTAGES

- ◆ Saves Time and Money
- ◆ Sets Quicker
- ◆ Stays Tacky Longer
- ◆ Rubber Like
- ◆ Simplifies Assembly
- ◆ Resists Solvents
- ◆ Water Based
- ◆ Cleans up with Soap and Water



FLEXIBLE - Taber's Gasket Sealer is ideal for use with cork, felt, paper, rubber and composite gaskets. It is designed to hold gaskets in place during assembly helping to prevent slipping or misalignment.

EASY TO APPLY - Simply coat the gasket and the application surface and allow to dry. Then make final assembly. All sizes include convenient dauber caps.

SAFE - Gasket Sealer is water based, environmentally and consumer friendly, nonflammable, nonhazardous, has low VOCs, and cleans up easily with soap and warm water before it dries.

TABER'S PRODUCTS, INC.
Email: orders@tabersproducts.com
P.O. Box 197 • 215 Main Street
Henrietta, Missouri 64036
Fax: (816) 494-5485

"It Pays To Stick With Taber's"
1-800-280-9903



GASKET SEALER

APPLICATION INSTRUCTIONS

Gaskets:


- 1) Make sure gaskets and all surfaces to which they are to be applied are clean, dry and free of dirt, rust, oil or dried paints or sealants.
- 2) Apply a thin even coating as required to gasket and application surface using dauber. A single coating is sufficient for most applications.
- 3) Let dry until Gasket Sealer is tacky (5-10 minutes at room temperature).
- 4) If strong adhesion is required apply a second coating to both surfaces.
- 5) Press gasket into place and commence assembly. Shrunken gaskets may be stretched until they line up properly.
- 6) Always use a torque wrench to ensure an even seal.

Temperature:

Apply between 40°F and 110°F.

Cleaning:

Cleans up with soap and warm water.

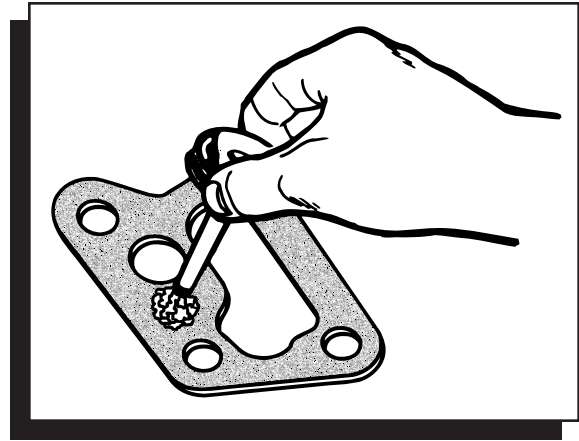

Belt Conditioner:

Apply sparingly to working surface of belt.
Do not apply when belt is running.

Pipe Threads:

Apply to both male and female threads.
Not recommended for petroleum pipes.

TECHNICAL SPECIFICATIONS

Description:

Taber's Gasket Sealer is a water-based, environmentally friendly compound formulated for use with gaskets made from cork, felt, paper, rubber and composite materials. It also seals pipe threads for light duty, and can be used as a belt conditioner (See instructions above). The product is not detrimental to hot dip tanks. Cleans up with soap and warm water before it dries. Nonflammable. Nonhazardous

Physical & Chemical Properties:

Appearance	Creamy dark gray liquid Black when cured
Odor	Characteristic of Isopropyl Alcohol
Flashpoint	Greater than 300°F
Viscosity	400-500 at 30 rpm Brookfield
Specific Gravity	1.1
Weight per Gal.	9.2
pH	6.5 - 7.0
Dry Time	5 - 10 Minutes at 68°F

Storage:

Tightly close container. Store in a dry place at a temperature between 40°F and 110°F. Do not allow to freeze. To minimize contamination, do not put unused product back in original container.

Incompatible Materials:

Not to be used with strong oxidizers such as chlorine or pure oxygen.

Health Warning:

Do not ingest. If swallowed consult your physician. Keep out of the reach of children. Contains Isopropyl Alcohol.

For specific information regarding the safe handling and disposal of Taber's Gasket Sealer please consult the MSDS. MSDS available by calling 1-800-280-9903.