

# **FREEZE PLUG SEAL**

## APPLICATIONS

- ◆ Freeze Plugs
- ◆ Pipe Threads

## ADVANTAGES

- ◆ Saves Time and Money
- ◆ Helps Prevent Leaks
- ◆ Eases Installation
- ◆ Dries Quickly
- ◆ Resists Solvents
- ◆ Not Detrimental to Hot Dip Tanks
- ◆ Cleans up with Soap and Water



|                 |       |        |          |
|-----------------|-------|--------|----------|
| Sizes Available | 2 oz. | 16 oz. | 1 gallon |
| Case Quantity   | 12    | 48     | 4        |

**ECONOMICAL** - Freeze Plug Seal is an economical solution to freeze plug installation problems. It will aid in plug installation and help stop coolant leaks. Includes dauber cap for easy application.

**SAFE** - Freeze Plug Seal is water based, environmentally and consumer friendly, nonflammable, nonhazardous, and cleans up with soap and warm water before it dries.

**TABER'S PRODUCTS, INC.**  
 Email: [salesorders@tabersproducts.com](mailto:salesorders@tabersproducts.com)  
 P.O. Box 197 • 215 Main Street  
 Henrietta, Missouri 64036  
 800-280-9903  
[www.tabersproducts.com](http://www.tabersproducts.com)

**"It Pays To Stick With Taber's"**  
**1-800-280-9903**



# FREEZE PLUG SEAL

## APPLICATION INSTRUCTIONS

### Directions:


- 1) Make sure both freeze plug and hole are clean, dry and free of dirt, rust, oil or dried paints or sealants.
- 2) Apply an even coating as required to plug using dauber. A single coating is sufficient for most applications.
- 3) Drive plug into engine block.
- 4) Wipe excess Freeze Plug Seal from block.

### Temperature:

Apply between 40°F and 110°F.

### Cleaning:

Cleans up with soap and warm water.

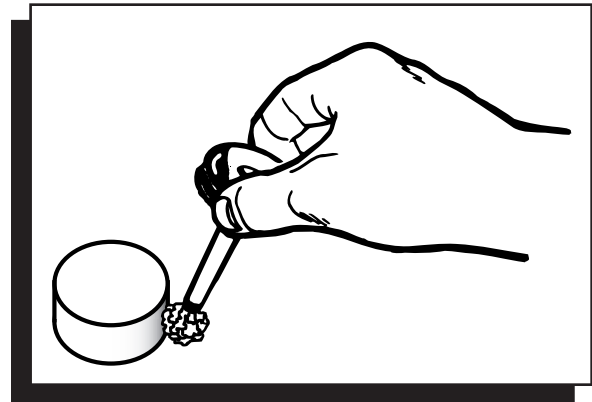

## TECHNICAL SPECIFICATIONS

### Description:

Taber's Freeze Plug Seal is a water-based, environmentally friendly product formulated to help seal freeze plugs on all types of engines. It also seals pipe threads for light duty. The product is not detrimental to hot dip tanks. Cleans up with soap and warm water before it dries. Nonflammable. Nonhazardous

### Physical & Chemical Properties:

|                  |  |
|------------------|--|
| Appearance       | Creamy gray liquid<br>Black when cured |
| Odor             | Characteristic of Isopropyl Alcohol    |
| Flashpoint       | Greater than 300°F                     |
| Viscosity        | 8000-9000 at 30 rpm<br>Brookfield      |
| Specific Gravity | 1.4                                    |
| Weight per Gal.  | 11.8                                   |
| pH               | 9.0 - 9.5                              |

### Storage:

Tightly close container. Store in a dry place at a temperature between 40°F and 110°F. Do not allow to freeze. To minimize contamination, do not put unused product back in original container.

### Incompatible Materials:

Not to be used with strong oxidizers such as chlorine or pure oxygen.

### Health Warning:

Do not ingest. If swallowed consult your physician. Keep out of the reach of children. Contains Isopropyl Alcohol.

Emergency telephone number  
INFOTRAC  
1-800-535-5053 (North America)

California residents: see Proposition 65 Information



**WARNING:** This product contains chemicals and/or sub-components that may cause cancer or reproductive harm per California Prop 65 - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)